

# MV-SI638-08GM/GC

## 6.0 MP X86 Open Platform



### Introduction

MV-SI638-08GM/GC is an open platform for users to develop their own programs according to actual demands. It has multiple interfaces, such as IO, serial port and extended interface, to communicate with other devices.

### Key Feature

- Adopts sensor platform for high-speed image processing.
- Open platform for users to develop their own programs.
- Multiple IO interfaces for input and output signals.
- Multiple LED indicators indicating real-time status to assist the configuration and debugging on site.
- Supports saving and exporting logs.
- Supports external extended module for meeting different application demands.


### Available Model

- Mono X86 open platform: MV-SI638-08GM
- Color X86 open platform: MV-SI638-08GC

### Applicable Industry

Consumer electronics, food and beverage, pharmaceutical, automobile, etc.

### Dimension

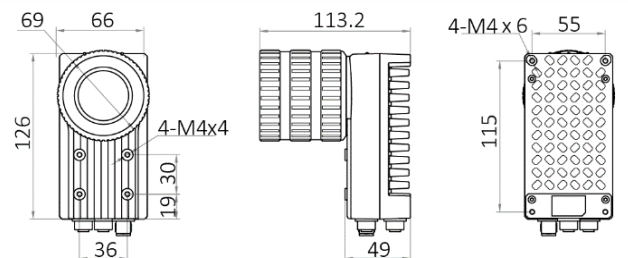

Unit: mm



# Specification

Model	MV-SI638-08GM	MV-SI638-08GC
<b>Tool</b>		
Function module	Open platform	
<b>Camera</b>		
Sensor type	CMOS, rolling shutter	
Sensor model	Sony® IMX178	
Pixel size	2.4 μm × 2.4 μm	
Sensor size	1/1.8"	
Resolution	3072 × 2048	
Max. frame rate	30 fps	
Dynamic range	71.3 dB	
SNR	41.3 dB	
Gain	0 dB to 15 dB	
Exposure time	27 μs to 2.5 sec	
Pixel format	Mono 8	Mono 8, Bayer GB 8, RGB 8
Mono/color	Mono	Color
<b>Platform</b>		
Platform type	Intel® X86 framework. Intel® E3845, quad-core CPU, 1.9 GHz	
Operating system	64-bit Windows 10	
Memory	DDR3L 4 GB	
Storage	128 GB SSD	
<b>Electrical feature</b>		
Data interface	Gigabit Ethernet interface	
Digital I/O	12-pin M12 connector, including opto input × 3 (LineIn 0/1/2), opto output × 3 (LineOut 0/1/2), and RS-232 × 1.	
Extended interface	17-pin extended interface for connecting extended module	
Power supply	24 VDC	
Power consumption	Approx. 24 W@24 VDC	
<b>Mechanical</b>		
Lens mount	C-mount	
Lens cap	Transparent lens cap	
Light source	White light	
Indicator	Power indicator (PWR), network indicator (LNK/ACT), and user-defined indicator (U1/U2)	
Dimension	126 mm × 66 mm × 113.2 mm (5.0" × 2.6" × 4.5")	
Weight	Approx. 750 g (1.7 lb.)	
Ingress protection	IP67 (under proper installation of lens and wiring)	
Temperature	Working temperature: 0 °C to 50 °C (32 °F to 122 °F) Storage temperature: -30 °C to 70 °C (-22 °F to 158 °F)	
Humidity	20% to 95% RH, non-condensing	
<b>General</b>		
Client software	MVS, VisionMaster	
Certification	CE, RoHS	

**HIKROBOT**

Hangzhou Hikrobot Co., Ltd.  
en.hikrobotics.com

© Hangzhou Hikrobot Co., Ltd. All Rights Reserved.

Hangzhou Hikrobot does not tolerate any infringement. Any organization or individual may not imitate or reproduce in whole or in part of the content. The data herein is based on Hikrobot's internal evaluation. Actual data may vary depending on specific configuration and operating condition. The information herein is subject to change without notice. All the content has been checked conscientiously. Nevertheless, Hikrobot shall not be liable to damages resulting from errors, inconsistencies or omissions.