

MV-ACP-H12p-open-ST-*m

12-PIN P10 Standard POWER&I/O CABLE

The 12-pin P10 Standard Power&I/O Cable can be used to power the camera, I/O signal wiring, and is available in a variety of lengths.




Applicable Camera:

Hikrobot 12-pin P10 Power and I/O Interface Industrial Camera

Order Models:

- 3m 12-pin P10 Standard Power&I/O Cable: MV-ACP-H12p-open-ST-3m
- 5m 12-pin P10 Standard Power&I/O Cable: MV-ACP-H12p-open-ST-5m
- 7m 12-pin P10 Standard Power&I/O Cable: MV-ACP-H12p-open-ST-7m
- 10m 12-pin P10 Standard Power&I/O Cable: MV-ACP-H12p-open-ST-10m
- 20m 12-pin P10 Standard Power&I/O Cable: MV-ACP-H12p-open-ST-20m

Dimension:

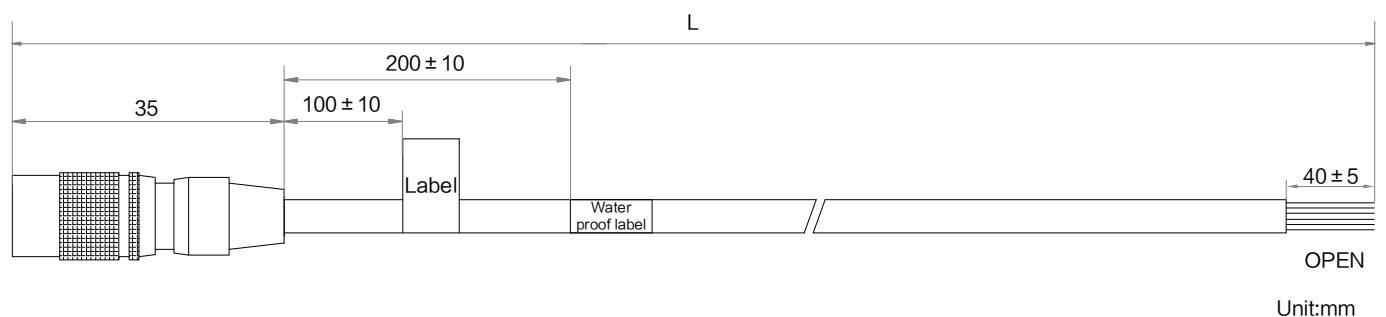

Pin Definition

	Pin	Wire Color	Pin	Wire Color
	1	Black	7	Brown
	2	Red	8	Orange
	3	White/Blue	9	Blue
	4	White/Green	10	Green
	5	Gray	11	Purple
	6	White	12	Yellow

Specification

Model		MV-ACP-H12p-open-ST-*m
Specifications	12-pin P10 Standard Power&I/O Cable	
	Physical specification	
End A connector	P10 12-pin, Female	
End B connector	Open	
Cable diameter	7.0 mm	
Length	3/5/7/10/20 m	
Cable mechanical	5P*26AWG+1P*24AWG+B	
Jacket	PVC	
Cable color	Black	
Connector model	made in China	
Connector durability	≥750 cycles	
Min. bending radius	84 mm	
Applicable scenario	Static scene	
Electrical specification		
Max. voltage	30 VDC	
Additional information		
Working temperature	-20°C ~ 75°C	
Certification	RoHS2.0, UL	
Packaging	Individual package	

Read the user manual for the camera including the precautions before connecting the cable to the camera.

HIKROBOT

Hangzhou Hikrobot Co., Ltd.
en.hikrobotics.com

© Hangzhou Hikrobot Co., Ltd. All Rights Reserved.

Hangzhou Hikrobot does not tolerate any infringement. Any organization or individual may not imitate or reproduce in whole or in part of the content. The data herein is based on Hikrobot's internal evaluation. Actual data may vary depending on specific configuration and operating condition. The information herein is subject to change without notice. All the content has been checked conscientiously. Nevertheless, Hikrobot shall not be liable to damages resulting from errors, inconsistencies or omissions.